

### SL2023-AWD

### JCPT2223RTB

Self-propelled Scissor Lifts

### SPECIFICATIONS


| Size                                | Metric      | British            |
|-------------------------------------|-------------|--------------------|
| Max. Working Height <b>A</b>        | 22.00m      | 72ft 2in           |
| Max. Platform Height <b>B</b>       | 20.00m      | 65ft 7in           |
| Overall Length <b>C</b>             | 4.95m       | 16ft 3in           |
| Overall Width <b>D</b>              | 2.46m       | 8ft 1in            |
| Overall Height(Rails Up) <b>E</b>   | 3.86m       | 12ft 8in           |
| Overall Height(Rails Down) <b>F</b> | 3.00m       | 9ft 10in           |
| Platform Size(Length×Width)         | 4.59m×2.25m | 15ft 1in × 7ft 5in |
| Platform Extension Size <b>G</b>    | 2.70m       | 8ft 10in           |
| Ground Clearance(Stowed/Raised)     | 0.40m       | 1ft 4in            |
| Wheelbase <b>H</b>                  | 3.30m       | 10ft 10in          |
| Turning Radius(Inside/Outside)      | 1.25m/3.40m | 4ft 1in/11ft 2in   |
| Tyres                               | 36×14-20    | 36×14-20           |

| Performance          |          |          |
|----------------------|----------|----------|
| S.W.L                | 750kg    | 1653lb   |
| S.W.L On Extension   | 750kg    | 1653lb   |
| Max. Occupants       | 4        | 4        |
| Gradeability         | 40%      | 40%      |
| Travel Speed(Stowed) | 4.7km/h  | 4.7km/h  |
| Travel Speed(Raised) | 0.4km/h  | 0.4km/h  |
| Max. Working Slope   | 2°/3°    | 2°/3°    |
| Up/Down Speed        | 75/75sec | 75/75sec |

| Weight         |         |         |
|----------------|---------|---------|
| Overall Weight | 13000kg | 28660lb |

| Power          |                |                |
|----------------|----------------|----------------|
| Diesel Engine  | 36.4kW/2600rpm | 36.4kW/2600rpm |
| Diesel Tank    | 100L           | 100L           |
| Hydraulic Tank | 150L           | 150L           |

\* The platform height plus 2m (7ft in British standard) is the working height.  
Standards Compliance

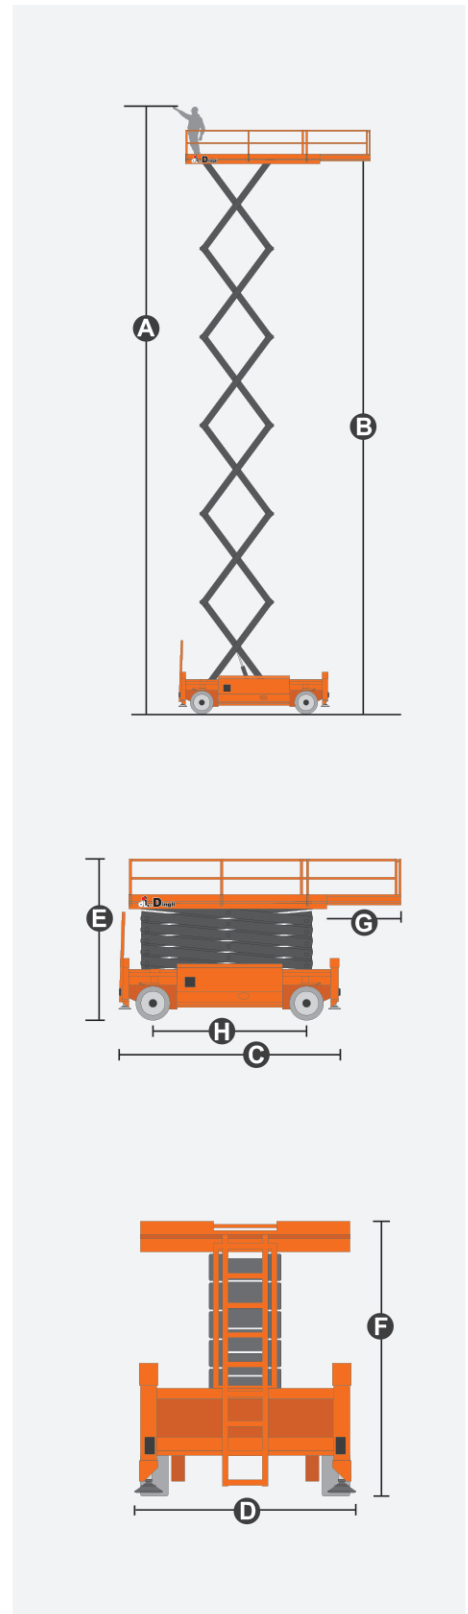

## SL2023-AWD

## JCPT2223RTB

Self-propelled Scissor Lifts

### FEATURES

#### Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- Charging Indicator
- 4x4 Drive
- 4x4 Steer
- Four-Wheel Braking
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Hydraulic Oil Cooling System
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Automatic One-Way Platform Extension Deck
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Anti-Restart Engine Protection
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Drivable At Full Height

#### Optional Items

##### Factory Tyres

- Solid Rubber Tyres \*\*
- Non-Marking Tyres

##### Factory Hydraulic Oil

- No. 46 Hydraulic Oil (Mineral Oil)\*\*

#### Additional Items

- GPS Unit
- Biodegradable Hydraulic Oil
- AC Power Cord to Platform
- Air Line to Platform
- Work Light Package
- Footpedal Switch
- Anti-Collision Bar on Platform
- Visual Spirit Level
- Hydraulic Generator
- Oil-Water Separator
- Outrigger Pad Package
- Guard Mesh Package
- Self-Lubrication System

\*\* Factory Default, If You Have Other Needs, Please Inform Dingli Regional Sales.